


- Application: Natural ventilation as single-drive
- Internal load dependent cut-off switch S2 in OPEN / CLOSE direction
- Parallel connection up to 8 drives in one group

TECHNICAL DATA

U_N	Rated voltage	230V AC (50 Hz)
I_N	Rated current	0,13 A
I_A	Cut-off current	0,2 A
P_N	Rated power	30 W
ED	Duty cycle	30 % (ON: 3 min./OFF: 7 min.)

	Protection rating	IP 32
	Ambient temperature range	-5 °C ... +75°C

F_Z	Pulling force max.	200 N
F_A	Pushing force	

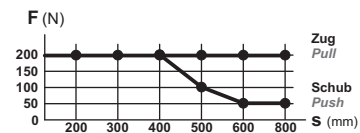

s > 600 mm only for pulling application

F_H	Pullout force	1.800 N (fastening depended)
	Chain	Stainless steel, without protruding rivet heads. Simple connection to casement brackets. Small bending radii allow maximum opening angles of small windows.

	Connecting cable	non-halogen, grey 6 x 0,75 mm ² , ~ 3 m
--	------------------	--

v	Speed	10,0 mm/s 10,0 mm/s
---	-------	----------------------

s	Stroke	50 – 800 mm (± 5 %)
---	--------	---------------------

L	Length	see order data
---	--------	----------------

	Sound pressure level A	≤ 70 dB (A)
--	------------------------	-------------

ORDER DATA							
s [mm]	L [mm]	Version	Finish	PU/pcs.	Part.-No.		
200	475	KS2 200 S2 230V R	E6/C-0	1	494920		
		KS2 200 S2 230V L	E6/C-0	1	494720		
300	520	KS2 300 S2 230V R	E6/C-0	1	494930		
		KS2 300 S2 230V L	E6/C-0	1	494730		
400	570	KS2 400 S2 230V R	E6/C-0	1	494940		
		KS2 400 S2 230V L	E6/C-0	1	494740		
500	685	KS2 500 S2 230V R	E6/C-0	1	494950		
		KS2 500 S2 230V L	E6/C-0	1	494750		
600	685	KS2 600 S2 230V R	E6/C-0	1	494960		
		KS2 600 S2 230V L	E6/C-0	1	494760		
800	765	KS2 800 S2 230V R	E6/C-0	1	494980		
		KS2 800 S2 230V L	E6/C-0	1	494780		

OPTIONS							
Special model		PU/pcs.	Part.-No.				
Drive housing painted/powder coated in other RAL colours							
Lump sum for coating					516030		
Specify at order stage:		1 – 20		516004			
		21 – 50		516004			
		51 – 100		516004			
		up 101		516004			
Extra length connecting cable:							
5 m – non-halogen, grey – 6 x 0,75 mm ²					501164		
10 m – non-halogen, grey – 6 x 0,75 mm ²					501166		